

PERMIT TO OPERATE AN AIR CONTAMINANT SOURCE

Date of Issuance 02/26/93

Application No. 1576111630K001

Effective Date 02/26/93

Permit Fee \$100

This document constitutes issuance to:

MAGNETEK OHIO TRANSFORMER
1776 CONSTITUTION AVENUE
LOUISVILLE

OHIO 44641

of a permit to operate for:

PAINT SPRAY BOOTH TRANSFORMERS
HIGH BAY SPRAY BOOTH

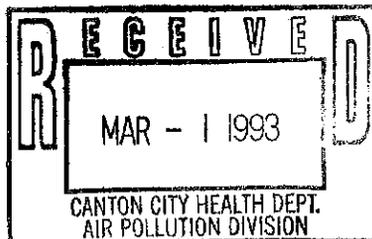
The following terms and conditions are hereby expressly incorporated into this permit to operate:

1. This permit to operate shall be effective until 02/25/96. You will be contacted approximately six months prior to this date regarding the renewal of this permit. If you are not contacted, please write to the appropriate Ohio EPA field office.
2. The above-described source is and shall remain in full compliance with all applicable State and federal laws and regulations and the terms and conditions of this permit.
3. Prior to any modification of this source, as defined in rule 3745-31-01 of the Ohio Administrative Code (OAC), a permit to install must be granted by the Ohio EPA pursuant to OAC Chapter 3745-31.
4. The Director of the Ohio EPA or an authorized representative may, subject to the safety requirements of the permit holder, enter upon the premises of this source at any time for purposes of making inspections, conducting tests, examining records or reports pertaining to any emission of air contaminants, and determining compliance with any applicable State and federal air pollution laws and regulations and the terms and conditions of this permit.
5. A permit fee in the amount specified above must be remitted within 15 days from the issuance date of this permit.
6. Any transferee of this permit shall assume the responsibilities of the prior permit holder. The appropriate Ohio EPA field office must be notified in writing of any transfer of this permit.
7. This source and any associated air pollution control system(s) shall be maintained regularly in accordance with good engineering practices in order to minimize air contaminant emissions. Any malfunction of this source or any associated air pollution control system(s) shall be reported immediately to the appropriate Ohio EPA field office in accordance with OAC rule 3745-15-06. Except as provided in that rule, any scheduled maintenance or malfunction necessitating the shutdown or bypassing of any air pollution control system(s) shall be accompanied by the shutdown of this source.
8. Any unauthorized or emergency release of an air contaminant from this source which, due to the toxic or hazardous nature of the material, may pose a threat to public health, or otherwise endanger the safety or welfare of the public, shall be reported immediately to the appropriate Ohio EPA field office (during normal business hours) or to the Ohio EPA's Emergency Response Group (1-800-282-9378). (Additional reporting may be required pursuant to the federal Comprehensive Environmental Response, Compensation, and Liability Act.)
9. The appropriate Ohio EPA field office is:
AIR POLLUTION CNTRL DIV. CANTON CITY HEALTH DEPT. -
CITY HALL 420 MARKET AVE., NORTH
CANTON, OH 44702-1544 (216)-489-3385
10. If this term and condition is checked, the permit holder is subject to the attached special terms and conditions.

OHIO ENVIRONMENTAL PROTECTION AGENCY

Donald R. Scheyardus

Director

EPA 3834
Revised 9-90

APPLICATION NUMBER: 15 76 11 1630 K001
FACILITY NAME: MAGNETEK OHIO TRANSFORMERS
EQUIPMENT DESCRIPTION: PAINT SPRAY BOOTH TRANSFORMERS
COMPANY ID: HIGH BAY SPRAY BOOTH

ADDITIONAL SPECIAL TERMS AND CONDITIONS

1. Best Available Technology (BAT) Determination

The following permit limitations and/or requirements are established in accordance with Ohio Administrative Code (OAC) rule 3745-31-05 and the Federal New Source Review requirements per the Best Available Technology (BAT) determination of Ohio EPA, PTI 15-512, effective 9-20-89.

The VOC emission limitation for this source are:

*56 lbs VOC/day
10.22 tons VOC/year*

2. Applicable State Regulation(s)

OAC rule 3745-21-09(U) establishes the applicable VOC emission limitation for this source. (This condition in no way limits the applicability of other requirements of the Ohio Administrative Code to this source.)

3. VOC Content Limitation(s)

The VOC contents of the coatings employed in this source shall not exceed 3.5 pounds of VOC per gallon of coating, excluding water.

4. Record-Keeping and Reporting Requirements for Surface Coating or Printing Lines

This facility shall maintain monthly records which list the following information for each surface coating, ink or cleanup material employed in this source:

- (a) the company identification of the surface coating, ink or cleanup material;
- (b) the number of gallons employed;
- (c) the VOC content, in pounds of VOC per gallon of coating;
- (d) the VOC content, in pounds of VOC per gallon of coating, minus water;

4. CONTINUED

- (e) the water content, in percent by volume;
- (f) the nonvolatile (solids) content, in percent by volume;
- (g) the gallons of cleanup material used; and
- (h) the density (in pounds per gallon) of the cleanup material used.

These monthly records, as well as any supporting coating or ink analyses and computations, shall be retained in the company's files for a period of not less than three years and shall be made available to the Director or any authorized representative of the Director for review during normal business hours.

This facility shall submit semi-annual reports to Canton City Health Department, Department of Air Pollution Control, 420 Market Avenue North, Canton, Ohio 44702, which summarize the following information for each coating and cleanup material employed in this source during the previous six calendar months: company identification of the surface coating or cleanup material, the total number of gallons employed, the VOC content (in pounds VOC per gallon of coating, minus water), the water content and the nonvolatile (solids) content. The reports shall be submitted by February 15 and August 15 of each year and shall cover the previous six calendar months (July through December and January through June, respectively).

5. *Exhaust filters will be maintained so that at least 97% of overspray is captured.*

PREPARED BY: DANIEL J. SCHILTZ

DATE PREPARED: 1-6-93