

PERMIT TO OPERATE AN AIR CONTAMINANT SOURCE

Date of Issuance 03/01/91

Application No. 1576131322F001

Effective Date 03/01/91

Permit Fee \$100

This document constitutes issuance to:

A. J. DIANA SONS, INC.
 1916 ERIE AVE., N.W.
 MASSILLON

OHIO 44646

of a permit to operate for:

PLANT ROADWAYS AND PARKING AREAS
 ROADWAYS AND PARKING OF ASPHALT PLANT

The following terms and conditions are hereby expressly incorporated into this permit to operate:

1. This permit to operate shall be effective until 02/28/94
 You will be contacted approximately six months prior to this date regarding the renewal of this permit. If you are not contacted, please write to the appropriate Ohio EPA field office.
2. The above-described source is and shall remain in full compliance with all applicable State and federal laws and regulations and the terms and conditions of this permit.
3. Prior to any modification of this source, as defined in rule 3745-31-01 of the Ohio Administrative Code (OAC), a permit to install must be granted by the Ohio EPA pursuant to OAC Chapter 3745-31.
4. The Director of the Ohio EPA or an authorized representative may, subject to the safety requirements of the permit holder, enter upon the premises of this source at any time for purposes of making inspections, conducting tests, examining records or reports pertaining to any emission of air contaminants, and determining compliance with any applicable State and federal air pollution laws and regulations and the terms and conditions of this permit.
5. A permit fee in the amount specified above must be remitted within 15 days from the issuance date of this permit.
6. Any transferee of this permit shall assume the responsibilities of the prior permit holder. The appropriate Ohio EPA field office must be notified in writing of any transfer of this permit.
7. This source and any associated air pollution control system(s) shall be maintained regularly in accordance with good engineering practices in order to minimize air contaminant emissions. Any malfunction of this source or any associated air pollution control system(s) shall be reported immediately to the appropriate Ohio EPA field office in accordance with OAC rule 3745-15-06. Except as provided in that rule, any scheduled maintenance or malfunction necessitating the shutdown or bypassing of any air pollution control system(s) shall be accompanied by the shutdown of this source.
8. Any unauthorized or emergency release of an air contaminant from this source which, due to the toxic or hazardous nature of the material, may pose a threat to public health, or otherwise endanger the safety or welfare of the public, shall be reported immediately to the appropriate Ohio EPA field office (during normal business hours) or to the Ohio EPA's Emergency Response Group (1-800-282-9378). (Additional reporting may be required pursuant to the federal Comprehensive Environmental Response, Compensation, and Liability Act.)
9. The appropriate Ohio EPA field office is:


DIV. OF AIR POLLUTION CNTRL CANTON CITY HEALTH DEPT.
 THIRD FLOOR, CITY HALL
 CANTON, OH 44702 (216) 489-3385

10. If this term and condition is checked, the permit holder is subject to the attached special terms and conditions.

OHIO ENVIRONMENTAL PROTECTION AGENCY

Berry Soannil

 Director

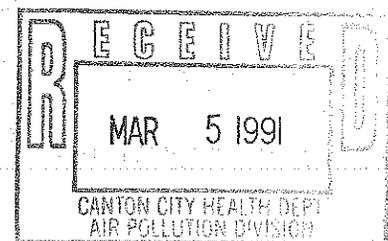

APPLICATION NUMBER: 15 76 13 1322 F001
FACILITY NAME: A. J. Diana Sons, Inc.
EQUIPMENT DESCRIPTION: Plant Roadways and Parking Areas
COMPANY ID: Roadways and Parking of Asphalt Plant

SPECIAL TERMS AND CONDITIONS

1. The following rules of the Ohio Administrative Code establish the applicable emission limitations and/or control requirements of this source:

3745-17-08

This condition in no way limits the applicability of other requirements of the Ohio Administrative Code to this source.)

2. A. J. Diana Sons, Inc. shall apply water, oil, asphalt, or any other suitable dust suppressant chemicals, as often as necessary on all unpaved roadways and parking areas to minimize or eliminate visible emissions of fugitive dust.
3. Speed zones shall be established, posted, enforced, and observed by all vehicles operating within the facility.
4. When waste oil is used for controlling fugitive dust, the following restrictions shall be followed:
 - a. A. J. Diana Sons, Inc. shall certify or possess certification that all waste oil used to control fugitive dust meets the PCB limitations set forth in 40 CFR 761, and that there are no listed hazardous waste or characteristic hazardous waste as set forth in 40 CFR 261.
 - b. A record should be kept for one year of the quantity of all oil applied and its certificate of compliance with 40 CFR 761 and 40 CFR 261. This certificate of compliance should include, but not be limited to, the name of the oil supplier and an analysis of the oil.

The analysis shall include a standard PCB test (gas chromatography using electron capture detector, using a column packing of OV-1 or OV-17 and a florisil clean-up) and representative sampling methods as specified in 40 CFR 261, Appl. I, II, III. This record shall be made available to the Director or his authorized representative for inspection.

- c. Waste oil shall be applied in such a manner as to prevent pollution of water of the state as required by the Ohio Revised Code, Section 6111.

- d. Waste oil should be applied only to unpaved roads and parking lot surfaces only between sunrise and sundown (daylight hours).
 - e. Waste oil shall not be applied to a water saturated surface nor to surfaces on days of predicted rainfall.
 - f. Waste oil shall not be applied at an application rate that allows pooling of liquid.
 - g. Waste oil shall not be applied to the same surface more frequently than twice per week.
 - h. The application of waste oil shall not cause runoff from the application surface.
 - i. Waste oil shall not be applied to vegetation near or adjacent to surfaces being treated.
 - j. Waste oil shall not be applied within 12 feet of structures crossing bodies of water or drainage ditches.
 - k. The discharge of waste oil must stop when applicator vehicle stops.
 - l. The applicator vehicle must be moving at least five (5) MPH at all times while the waste oil is being applied.
 - m. The applicator vehicle discharge valve shall be locked closed between the waste oil collection point and the specified surfaces which have been approved for waste oil application.
 - n. Any valves that provide for tank draining other than through the spreader bar must be locked closed during waste oil application and transport. The angle of discharge from the applicator vehicle spreader bar shall not be greater than 60 degrees from the perpendicular to the unpaved surfaces.
5. A. J. Diana Sons, Inc. will maintain records of when dust control substances were applied. These records shall be available for inspection by members of this agency during regular business hours.
 6. A. J. Diana Sons, Inc. shall advise the Canton Air Pollution Control Agency at least one week in advance of the opening of this plant before the operating season begins in order to allow an inspection of the plant area for fugitive dust control compliance.