

**PERMIT TO OPERATE AN AIR CONTAMINANT SOURCE**

Date of Issuance 04/21/89

Application No. 1576010014P005

Effective Date 04/21/89

Permit Fee \$500

This document constitutes issuance to:

AMER STEEL FOUNDERS DV OF AMSTED IND INC  
 1001 EAST BROADWAY  
 ALLIANCE OHIO 44601

of a permit to operate for:

SAND COOLER SYSTEM W/CYCLONE & IMPINGEMENT SCRUBBER  
 #17 SAND MILL


The following terms and conditions are hereby expressly incorporated into this permit to operate:

1. This permit to operate shall be effective until 04/21/92  
 You will be contacted approximately six months prior to this date regarding the renewal of this permit. If you are not contacted, please write to the appropriate Ohio EPA field office.
  2. The above-described source is and shall remain in full compliance with all applicable State and federal laws and regulations and the terms and conditions of this permit.
  3. Prior to any modification of this source, as defined in rule 3745-31-01 of the Ohio Administrative Code (OAC), a permit to install must be granted by the Ohio EPA pursuant to OAC Chapter 3745-31.
  4. The Director of the Ohio EPA or an authorized representative may, subject to the safety requirements of the permit holder, enter upon the premises of this source at any reasonable time for purposes of making inspections, conducting tests, examining records or reports pertaining to any emission of air contaminants, and determining compliance with any applicable State and federal air pollution laws and regulations and the terms and conditions of this permit.
  5. A permit fee in the amount specified above must be remitted within 15 days from the issuance date of this permit.
  6. Any transferee of this permit shall assume the responsibilities of the prior permit holder. The appropriate Ohio EPA field office must be notified in writing of any transfer of this permit.
  7. This source and any associated air pollution control system(s) shall be maintained regularly in accordance with good engineering practices in order to minimize air contaminant emissions. Any malfunction of this source or any associated air pollution control system(s) shall be reported immediately to the appropriate Ohio EPA field office in accordance with OAC rule 3745-15-06. Except as provided in that rule, any scheduled maintenance or malfunction necessitating the shutdown or bypassing of any air pollution control system(s) shall be accompanied by the shutdown of this source.
  8. Any unauthorized or emergency release of an air contaminant from this source which, due to the toxic or hazardous nature of the material, may pose a threat to public health, or otherwise endanger the safety or welfare of the public, shall be reported immediately to the appropriate Ohio EPA field office (during normal business hours) or to the Ohio EPA's Emergency Response Group (1-800-282-9378). (Additional reporting may be required pursuant to the federal Comprehensive Environmental Response, Compensation, and Liability Act.)
  9. The appropriate Ohio EPA field office is:  
 DIV. OF AIR POLLUTION CNTRL CANTON CITY HEALTH DEPT.  
 THIRD FLOOR, CITY HALL  
 CANTON, OH 44702 (216) 489-3385
10.  If this term and condition is checked, the permit holder is subject to the attached special terms and conditions.

OHIO ENVIRONMENTAL PROTECTION AGENCY



Director

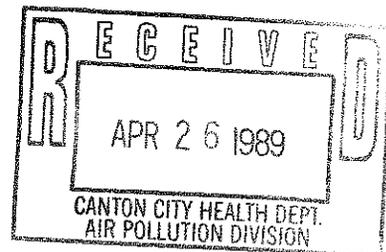

APPLICATION NUMBER:

15 76 01 0014 P005

FACILITY NAME:

Amer Steel Founders Dv of Amsted Ind Inc

EQUIPMENT DESCRIPTION:

Sand Cooler System w/ Cyclone &  
Impingement Scrubber

COMPANY ID:

#17 Sand Mill

### SPECIAL TERMS AND CONDITIONS

1. The following rules of the Ohio Administrative Code establish the applicable emission limitations and/or control requirements of this source:

3745-17-07, 3745-17-11, 3745-31-05

(This condition in no way limits the applicability of other requirements of the Ohio Administrative Code to this source.)

2. Allowable Mass Emission Limitation(s) and/or Control Requirements:

The mass emissions from this source shall not exceed the following:

3.77 lb. part./hour

3. An impingement scrubber and cyclone will be employed so that at least 99 percent of the particulate emissions from this source are controlled. These control devices will be maintained properly so that this collection efficiency is maintained.
4. A magnehelic differential pressure gauge will be employed to measure pressure drop across the collector.